




REV	DC/EC NUMBER	DESCRIPTION	DATE

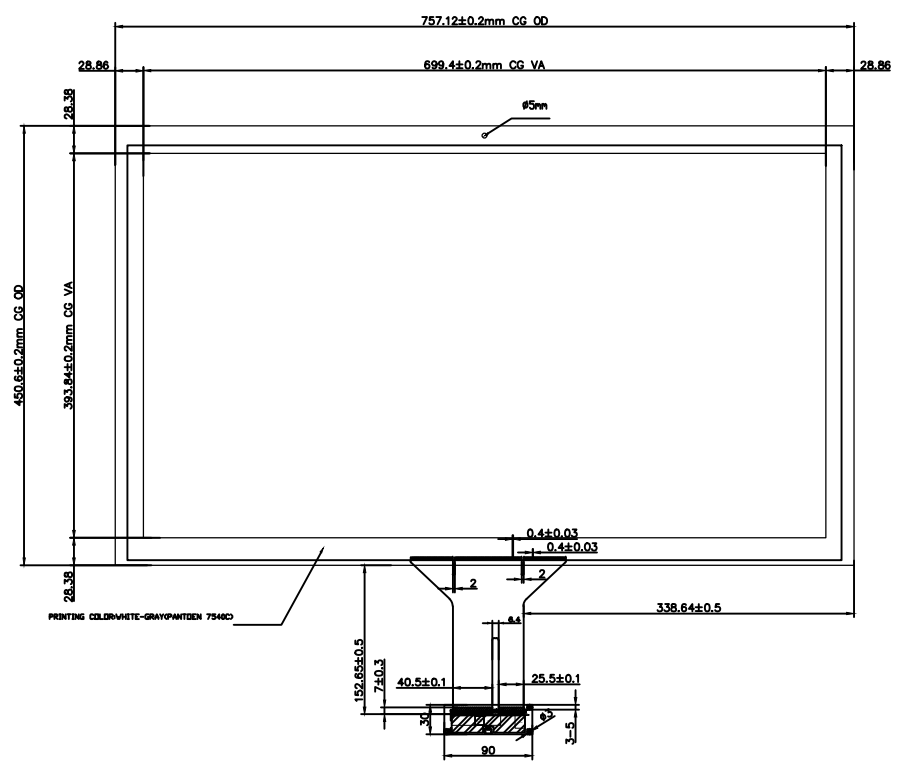

TOP VIEW

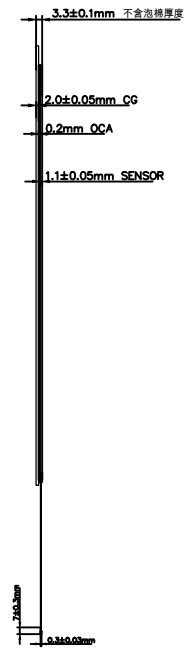

SIDE VIEW

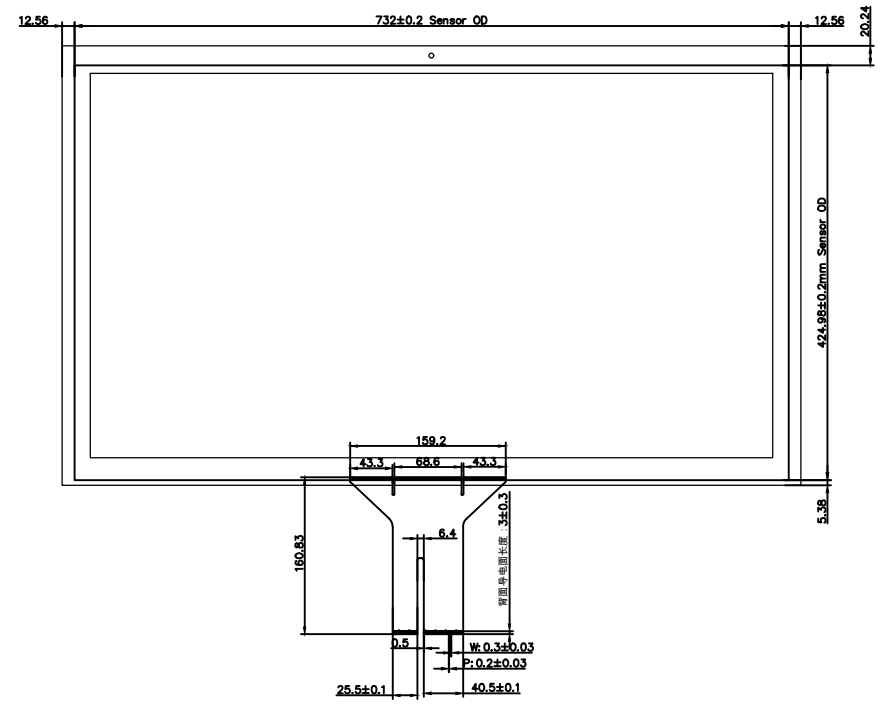

BOTTOM VIEW

J3(USB 通讯)

PIN	定义
1	VDD/5V
2	D-
3	D+
4	GND

- Notes :
1. Structure : G+G;
 2. Type : COB; IC : ILI 2312 (RX78*TX46) Operting Voltage: 3.3V-5V
 3. Transmittance : ≥85 %
 4. Hardless : 6H
 5. Operating conditions : -10°C~+60°C , ≤85%RH
 6. Storage conditions : -10°C~+65°C , ≤85%RH
 7. Unspecified tolerance: ±0.2mm
 8. All materials in the drawing comply with the Rosh

CONTROL DIMENTION:		XINSUN DISPLAY INTEGRATION LTD.			
REFERENCE DIMENTION:	()				
APPROVED:	JOBS	MODEL NAME	3rd ANGLE		
CHECKED:	ERIC	PART NAME	CTP3204678A1-GG	UNIT	mm
DESIGNED:	ISSCA	DRAWING NUMBER	DR17122301-1 V00	SCALE	1:1
		METERIAL NUMBER		PAGE	1/1