
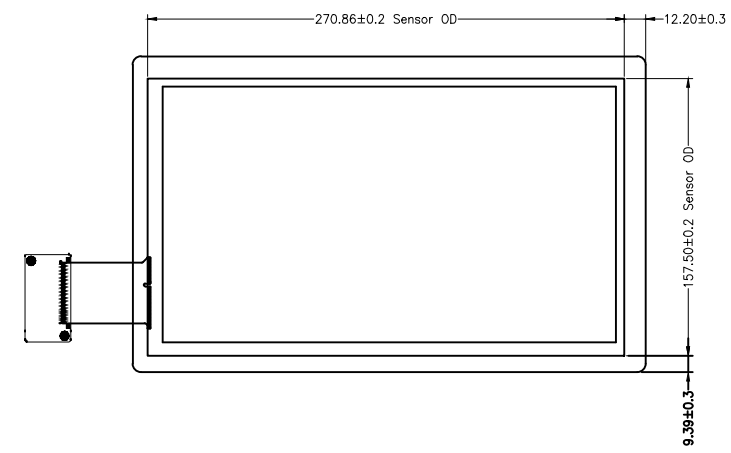


REV	DC/EC NUMBER	DESCRIPTION	DATE

TOP VIEW

SIDE VIEW

BOTTOM VIEW

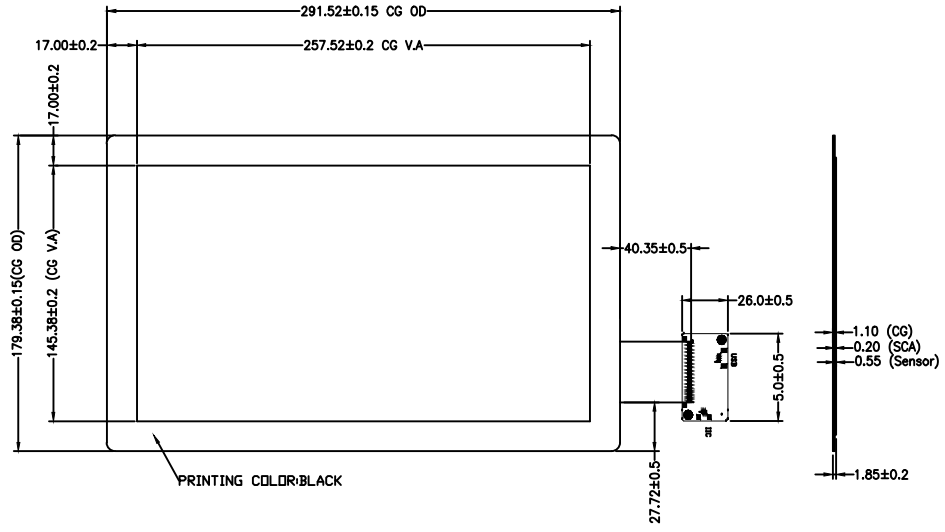

PRINTING COLOR:BLACK

- Notes :
1. Structure : G+G;
 2. Type : COB; IC : ILI 2511 Operating Voltage: 5V
 3. Transmittance : $\geq 86\%$
 4. Hardless : 6H
 5. Operating conditions : $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$, $\leq 85\% \text{RH}$
 6. Storage conditions : $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 85\% \text{RH}$
 7. Unspecified tolerance: $\pm 0.2 \text{mm}$
 8. All materials in the drawing comply with the RoSH

USB Connector(J1)	
1	VCC(5V)
2	DN
3	DP
4	GND

CONTROL DIMENTION:		XINSUN DISPLAY INTEGRATION LTD	
REFERENCE DIMENTION:		()	
APPROVED:	JOBS	MODEL NAME	3rd ANGLE
CHECKED:	ERIC	PART NAME	UNIT mm
DESIGNED:	ISSCA	DRAWING NUMBER	SCALE 1:1
		MATERIAL NUMBER	PAGE 1/1