
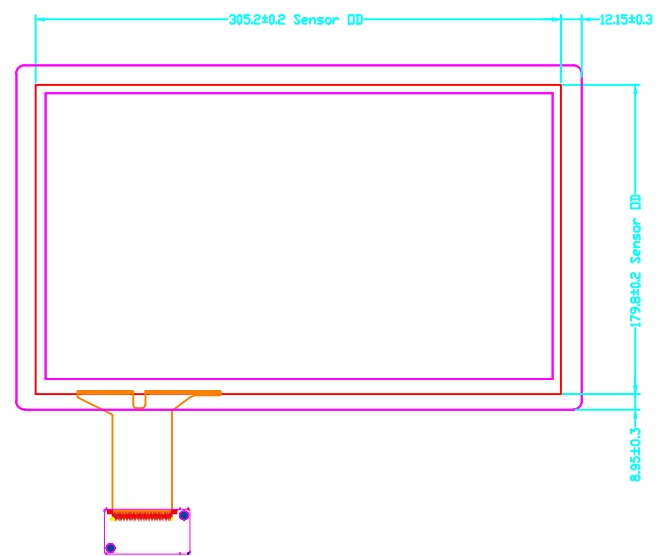
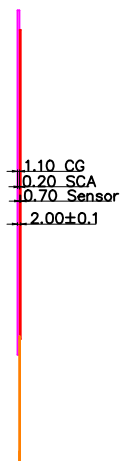


REV	DC/EC NUMBER	DESCRIPTION	DATE

TOP VIEW

SIDE VIEW

BOTTOM VIEW

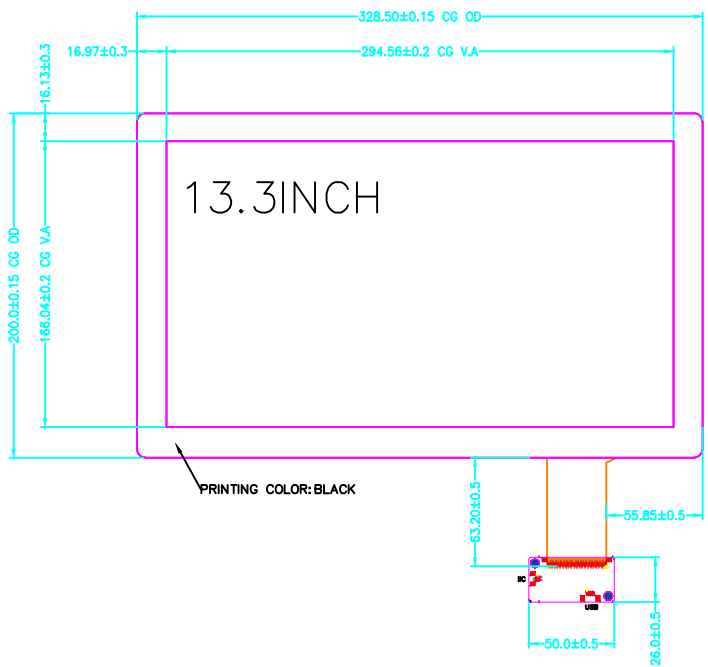

Notes :

1. Structure : G+G;
2. Type : COB; IC : ILI 2511 Operating Voltage: 5V
3. Transmittance : $\geq 86\%$
4. Hardless : 6H
5. Operating conditions : $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$, $\leq 85\% \text{RH}$
6. Storage conditions : $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 85\% \text{RH}$
7. Unspecified tolerance : $\pm 0.2 \text{mm}$
8. All materials in the drawing comply with the RoSH

USB Connector(J1)	
1	VCC(5V)
2	DN
3	DP
4	GND

CONTROL DIMENTION:		XINSUN DISPLAY INTEGRATION LTD.		
REFERENCE DIMENTION:	()			
APPROVED:	JOBS	MODEL NAME	3rd ANGLE	
CHECKED:	ERIC	PART NAME	UNIT	mm
DESIGNED:	ISSCA	DRAWING NUMBER	SCALE	1:1
		MATERIAL NUMBER	PAGE	1/1