


REV	DC/EC NUMBER	DESCRIPTION	DATE

TOP VIEW

SIDE VIEW

BOTTOM VIEW

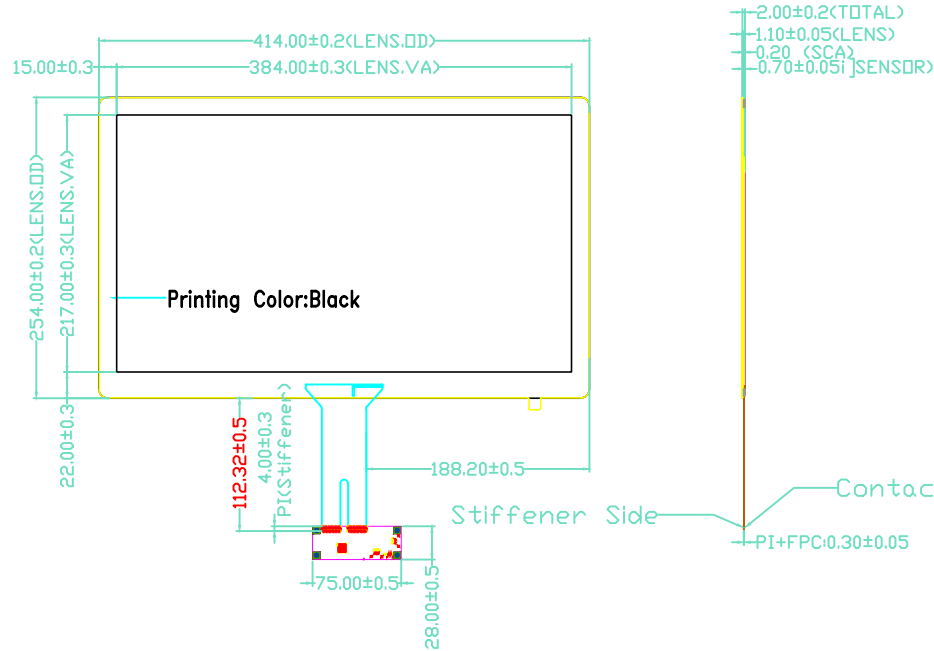

Notes :

1. Structure : G+G;
2. Type : COB; IC : ILI 2510 Operating Voltage: 5V
3. Transmittance : ≥86 %
4. Hardless : 6H
5. Operating conditions : -10°C~+60°C , ≤85%RH
6. Storage conditions : -20°C~+70°C , ≤85%RH
7. Unspecified tolerance: ±0.2mm
8. All materials in the drawing comply with the RoSH

USB Connector(J1)	
1	VCC(5V)
2	DN
3	DP
4	GND

CONTROL DIMENTION:		XINSUN DISPLAY INTEGRATION LTD		
REFERENCE DIMENTION:	()			
APPROVED:	JOBS	MODEL NAME	3rd ANGLE	
CHECKED:	ERIC	PART NAME	XCT1733561A1-GG	UNIT
DESIGNED:	ISSCA	DRAWING NUMBER		SCALE
		MATERIAL NUMBER		PAGE
				1/1