
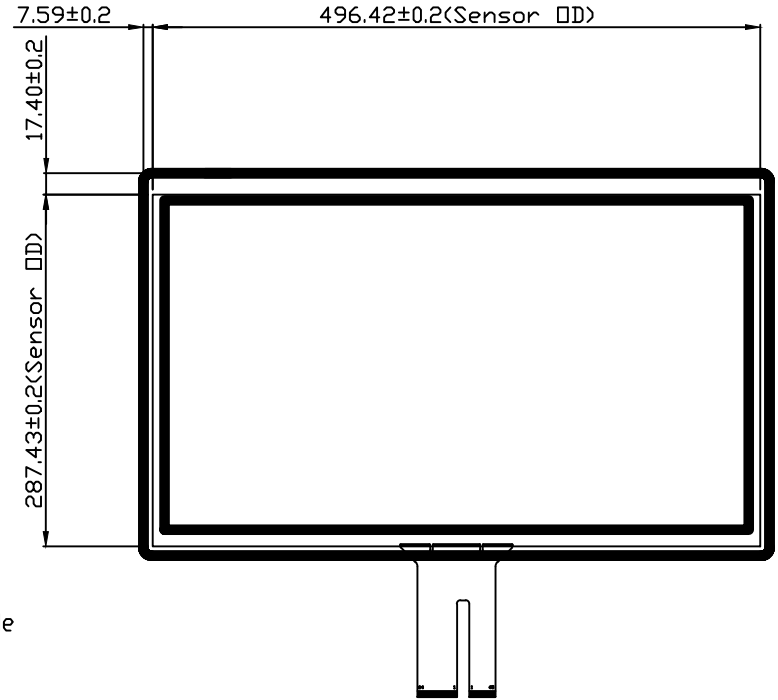
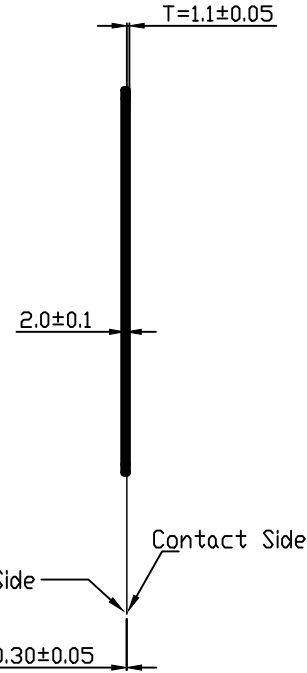


REV	DC/EC NUMBER	DESCRIPTION	DATE

TOP VIEW

SIDE VIEW

BOTTOM VIEW

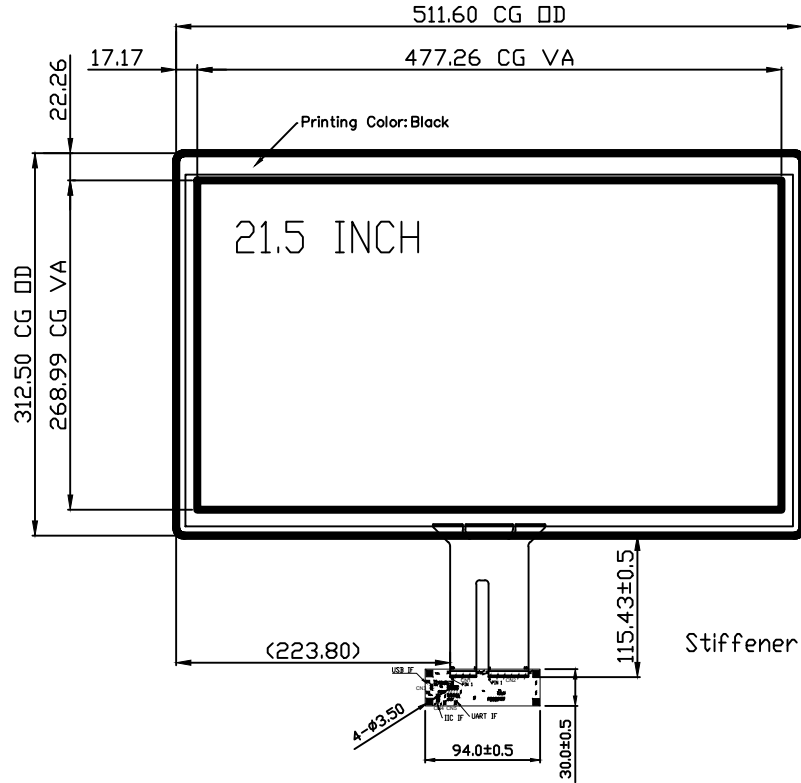

Notes :

1. Structure : G+G;
2. Type : COB; IC : ILI 2510 Operating Voltage: 5V
3. Transmittance : ≥86 %
4. Hardless : 6H
5. Operating conditions : -10°C~+60°C , ≤85%RH
6. Storage conditions : -20°C~+70°C , ≤85%RH
7. Unspecified tolerance: ±0.2mm
8. All materials in the drawing comply with the RoSH

USB Connector(CN3)	
1	VCC(5V)
2	DN
3	DP
4	GND

UART Connector(CN5)	
1	VDD/5V
2	232RXD
3	232TXD
4	GND

IIC Connector(CN4)	
1	VDD33
2	GNDIN
3	I2C_SDA
4	I2C_SCL
5	I2C_INT
6	RSTN

CONTROL DIMENTION:		XINSUN DISPLAY INTEGRATION LTD.	
REFERENCE DIMENTION:	()	MODEL NAME	3rd ANGLE
APPROVED:	JOBS	PART NAME	XCT2153460A1-GG
CHECKED:	ERIC	DRAWING NUMBER	UNIT mm
DESIGNED:	ISSCA	MATERIAL NUMBER	SCALE 1:1
			PAGE 1/1