REV	DC/EC NUMBER	DESCRIPTION	DATE

TOP VIEW

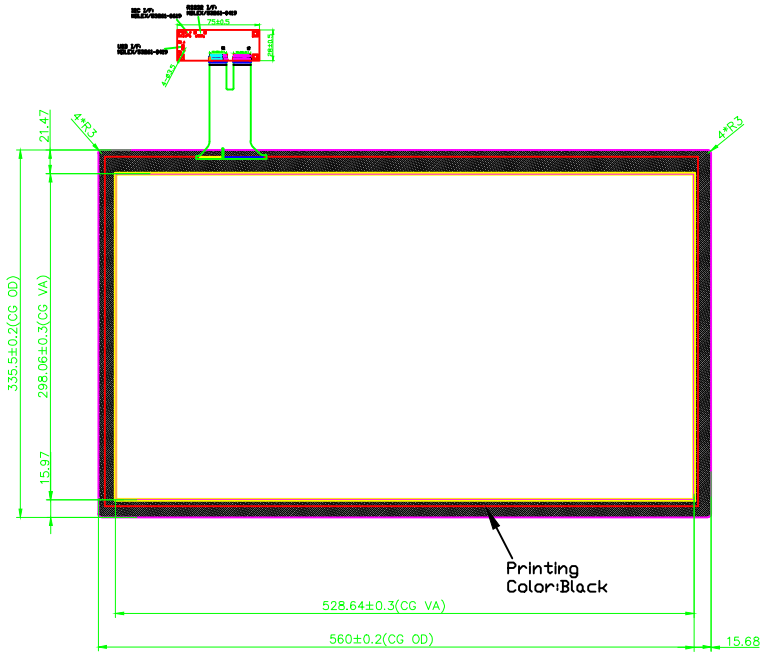

SIDE VIEW

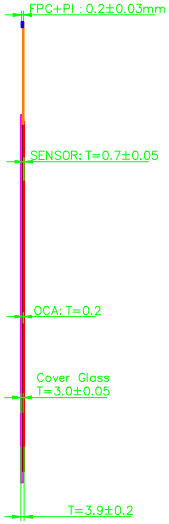

BOTTOM VIEW

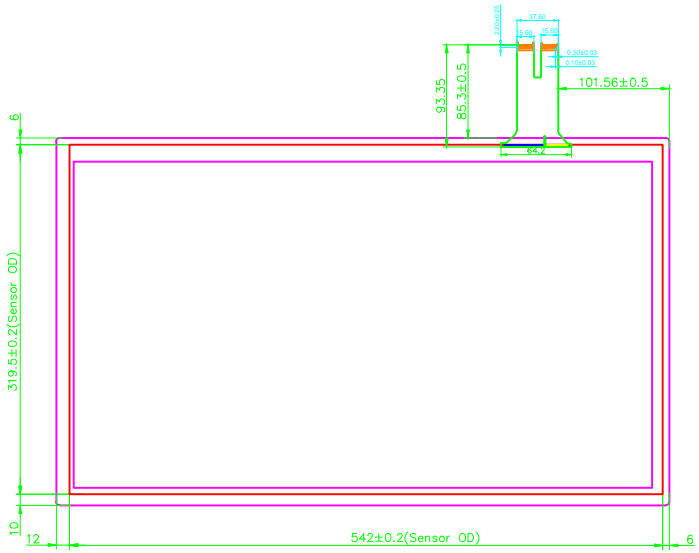

USB I/F

NO.	SYMBOL
1	VDD/5V
2	D−
3	D+
4	GND

RS232 I/F:

NO.	SYMBOL
1	VBUSIN
2	NC
3	232TXD
4	EGND

IIC I/F:

NO.	SYMBOL
1	VDDIN
2	RSTB
3	SCL
4	SDA
5	INT
6	EGND

Notes:

1.Structure:G+G
2.Type:COB;IC:ILI 2510 Operting Voltage:3.3V-5V
3.Transmittance:≥85%
4.Hardless:6H
5.Operating conditions:-20°C~+70°C,≤85%RH
6.Storage conditions:-20°C~+70°C,≤85%RH
7.Unspecified tolerance:±0.3mm
8.All materials in the drawing comply with the RosH

CONTROL DIMENTION:		XINSUN DISPLAY	
REFERENCE DIMENTION:	( )		
APPROVED:	JOBS	MODEL NAME	3rd ANGLE
CHECKED:	ERIC	PART NAME: XCT2383561A1-GG V01	UNIT: mm
DESIGNED:	ISSCA	DRAWING NUMBER	SCALE: 1:1
		METERIAL NUMBER	PAGE: 1/1