



REV	DC/EC NUMBER	DESCRIPTION	DATE

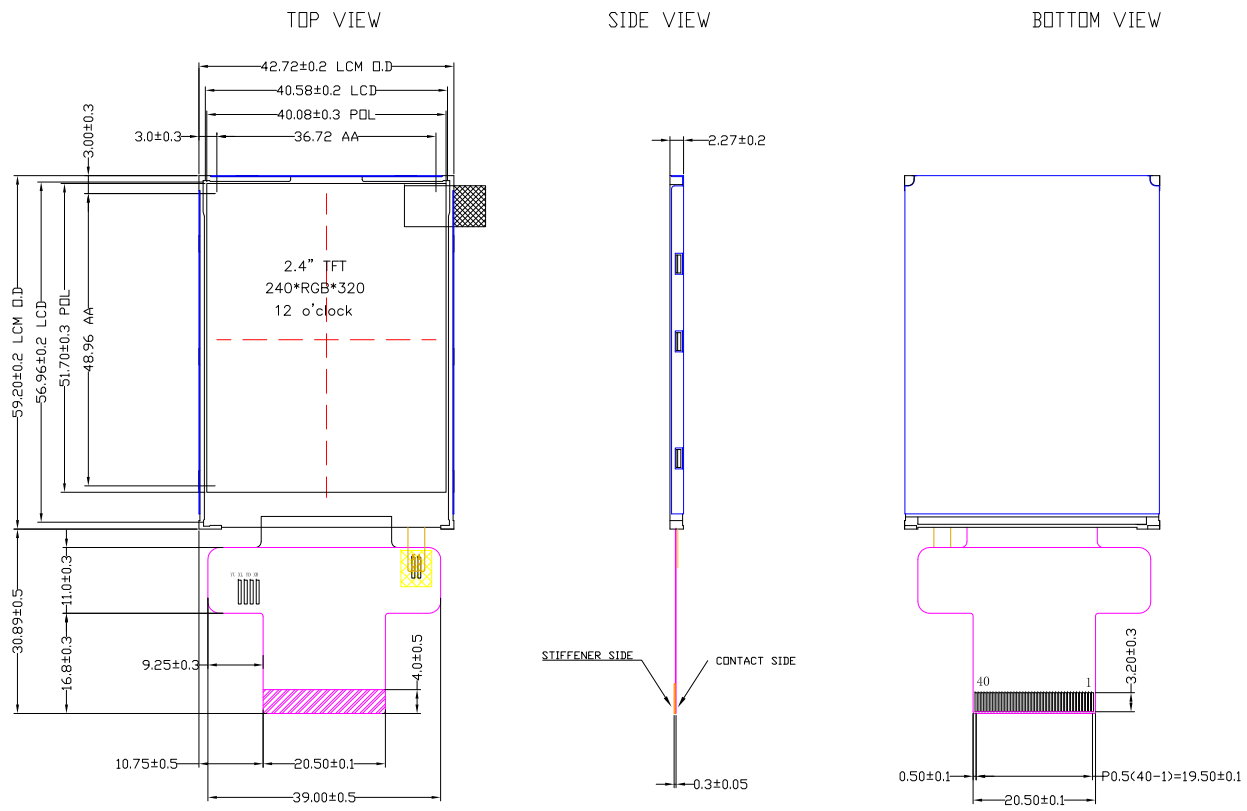

I/F

PIN NO.	SIGNAL
1	GND
2	VDD
3	VDD
4	IDVDD
5	RST
6	/CS
7	SCL
8	D/C
9	SDA
10	VSYNC
11	HSYNC
12	DOTCLK
13	ENABLE
14	D0
15	D1
16	D2
17	D3
18	D4
19	D5
20	D6
21	D7
22	D8
23	D9
24	D10
25	D11
26	D12
27	D13
28	D14
29	D15
30	D16
31	D17
32	SDD
33	LED-K
34	LED-K
35	LED-K
36	LED-K
37	NC
38	LED-A
39	GND
40	NC

- NOTES:
- 1.DISPLAY MODE : TFT 2.4" 240RGBx320,TN,NORMALLY WHITE
  - 2.DRIVE IC : ST7789V2 OR EQUIVALENT
  - 3.VIEW DIRECTION: 6 O'CLOCK
  - 4.GRAY INVERSION DIRECTION: 12 O'CLOCK
  - 5.BACKLIGHT:ILED=20mA\*6,VLED=5.6V~6.8V
  - 6.BRIGHTNESS:850min.,1000typ.
  - 7.OPERATING VOLTAGE: 2.8V
  - 8.OPERATING TEMPERATURE: -20°C TO 70°C  
STORAGE TEMPERATURE: -30°C TO 80°C
  - 9.PRODUCTS CONFORM TO ROHD STANDARD.
  - 10.GENERAL TOLERANCE : ±0.2mm.



CONTROL DIMENTION:		XINSUN DISPLAY INTEGRATION	
REFERENCE DIMENTION:		( )	
APPROVED:	JOBS	MODEL NAME	3rd ANGLE
CHECKED:	ERIC	PART NAME	UNIT
DESIGNED:	ISSCA	DRAWING NUMBER	SCALE
		MATERIAL NUMBER	PAGE
			1/1