



REV	DC/EC NUMBER	DESCRIPTION	DATE

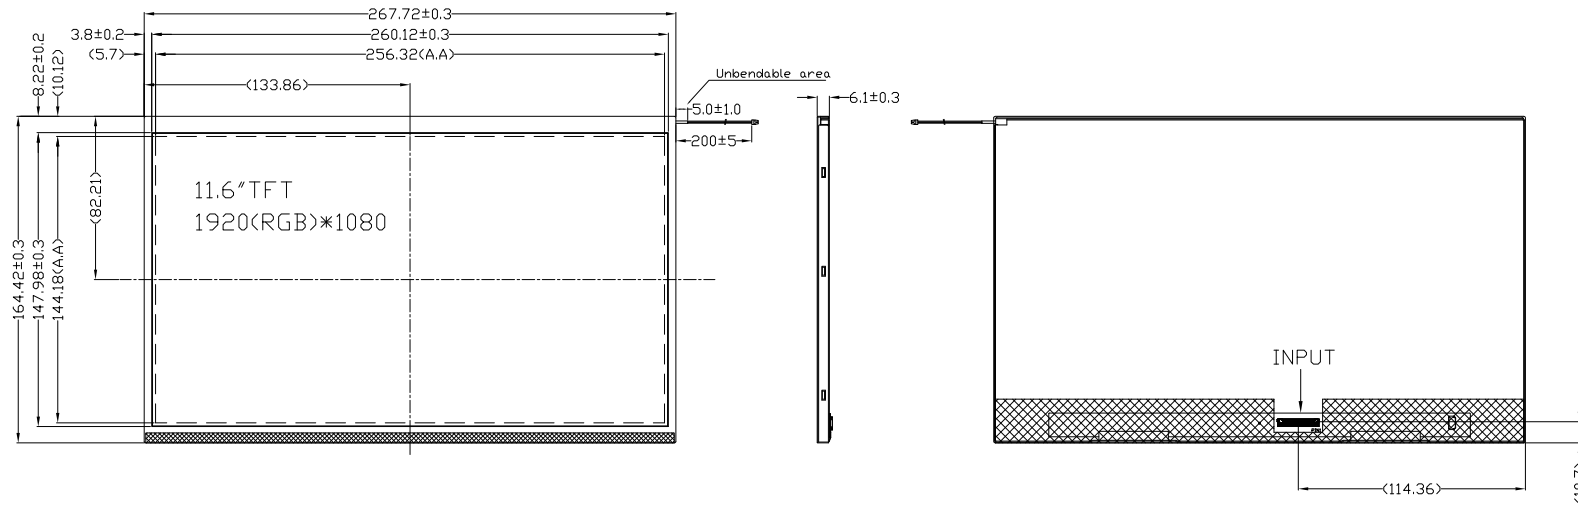

Backlight LED Circuit

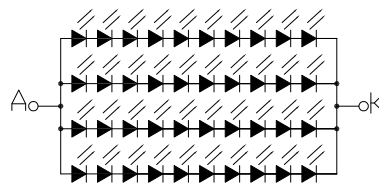

Interface for TFT

PIN	symbol	PIN	symbol	PIN	symbol
1	NC	11	H-GND	21	NC
2	H-GND	12	LCD_VDD	22	NC
3	LANE_1_N	13	LCD_VDD	23	NC
4	LANE_1_P	14	NC	24	NC
5	H-GND	15	LCD_GND	25	NC
6	LANE_0_N	16	LCD_GND	26	NC
7	LANE_0_P	17	HPD	27	NC
8	H-GND	18	NC	28	NC
9	AUX_CH_P	19	NC	29	NC
10	AUX_CH_N	20	NC	30	NC

TFT NOTE:

- 1.LCD TYPE:11.6",TFT,IPS,Normally Black
- 2.VIEWING DIRECTION:ALL
- 3.BRIGHTNESS: 500cd/m² typ. at ILED=180mA
at VLED=28V~33V
- 4.Luminace uniformity:70%(min)(min/max*100%)
- 5.OPERATION TEMP:;-10°C~60°C
- 6.STORAGE TEMP:;-20°C~70°C
- 7.NON-MARK TOLERANCE is ±0.3mm
- 8.RDHS CPMPPLAIN

CONTROL DIMENTION:			XINSUN DISPLAY INTEGRATION		
REFERENCE DIMENTION:	()		MODEL NAME	3rd ANGLE	
APPROVED:	JOBS	PART NAME	XF116FHD01A-IEHL	UNIT	mm
CHECKED:	ERIC	DRAWING NUMBER		SCALE	1:1
DESIGNED:	ISSCA	MATERIAL NUMBER		PAGE	1/1