
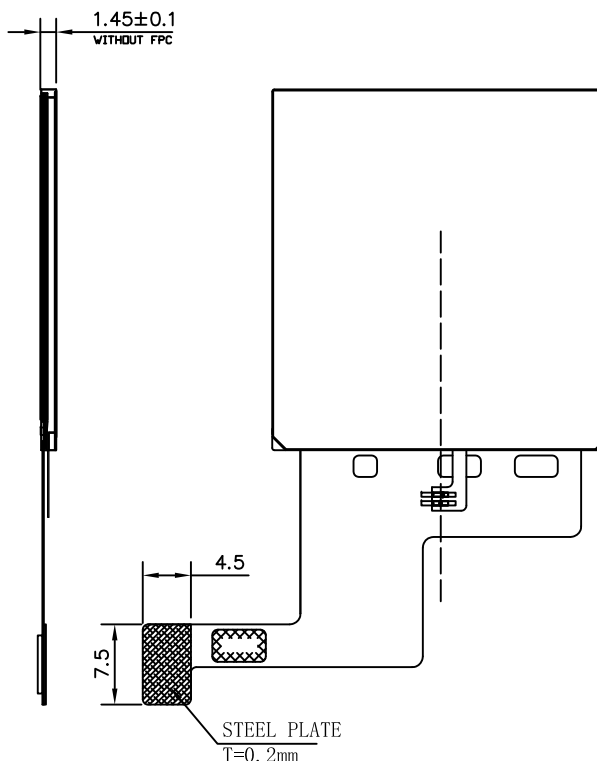


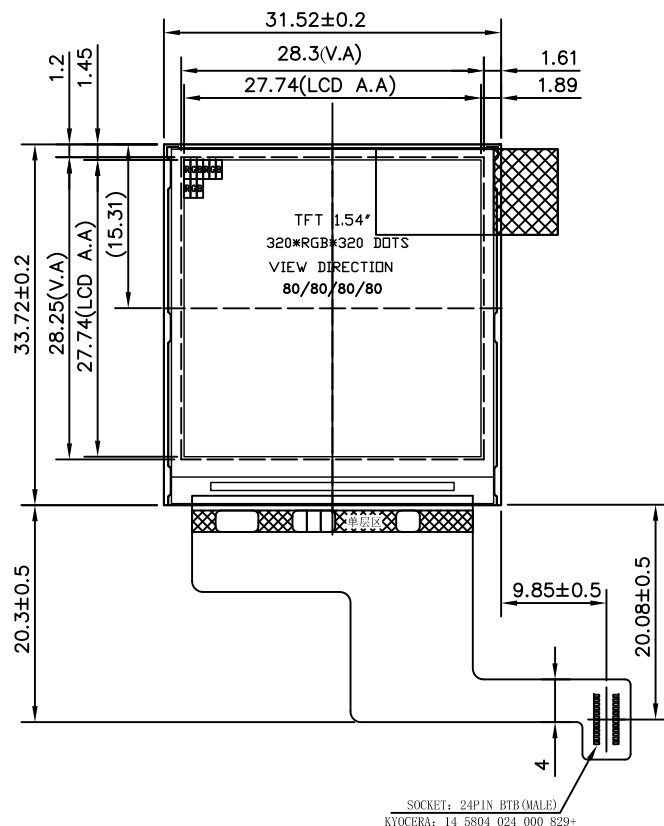



PIN	NAME
1	VCC(2.8V)
2	GND
3	VCC(2.8V)
4	CLK_N
5	IOVCC(1.8V)
6	CLK_P
7	RESET
8	GND
9	TE
10	DATA0_N
11	GND
12	DATA0_P
13	NC
14	GND
15	NC
16	NC
17	GND
18	NC
19	NC
20	GND
21	LED+
22	LED-
23	LED-
24	LED-

NOTES:

- 1.DISPLAY TYPE: 1.54"TFT
- 2.VIEWING DIRECTION: ALL
- 3.LCD DRIVE IC: ST7796S
- 4.POLARIZER MODE: TRANSMISSIVE/NAGETIVE
- 5.OPERATING TEMP: -20° C~+70° C
- 6.STORAGE TEMP: -30° C~+80° C
- 7.UNMARKER TOLERANCE: ±0.20
- 8.PROTECTION: RoHS

LED CIRCUIT



			MODEL	XF015320320A-ISNL			 XINSUN DISPLAY INTEGRATION			
			DRAWING	LGZ	DATE	2016.07.02				
			CHECK		DATE					
	NEW	2016.07.02	APPROVE		DATE		PAGE	1 of 1	UNIT	mm
REV.	CONTENT	DATA	TOLERANCE	.X ±0.3, .XX ±0.2	SCALE		SIZE	A4	 (3)	