


REV	DC/EC NUMBER	DESCRIPTION	DATE


INTREFFACE
FOR TFT

PIN	SYMBOL
01	NC
02	LEDA
03	LEDA
04	LEDK
05	LEDK
06	GND
07	VCC2.8V
08	IDVCC1.8V
09	NC
10	TE
11	RSTB
12	GND
13	D0N
14	D0P
15	GND
16	D1N
17	D1P
18	GND
19	CLKN
20	CLKP
21	GND
22	D2N
23	D2P
24	GND
25	D3N
26	D3P
27	GND
28	GND
29	NC
30	NC


TOP VIEW

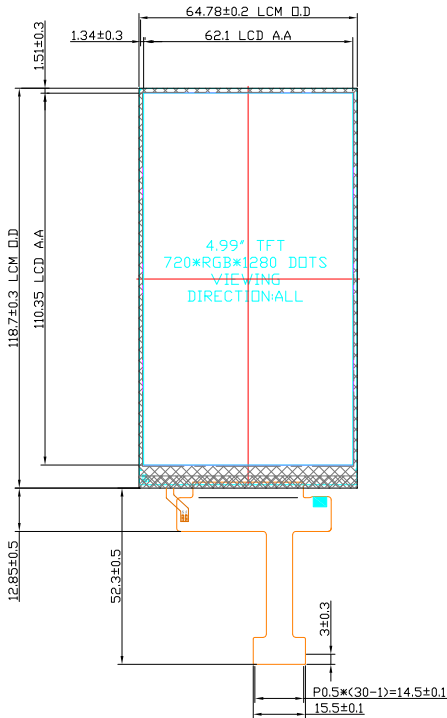


SIDE VIEW

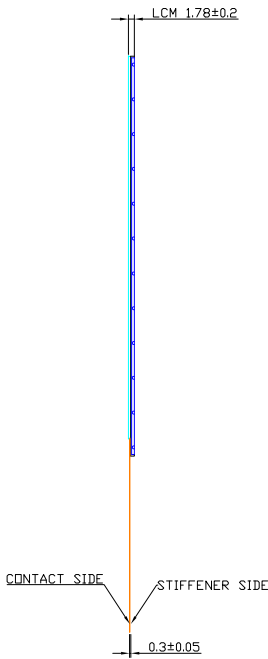

BOTTOM VIEW

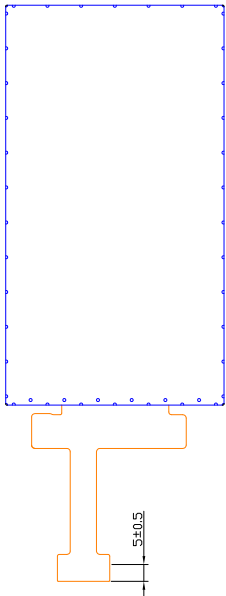

LED CIRCUIT DIAGRAM



IF=2*20mA, VF=17.4V~19.8V

NOTES:

1. DISPLAY MODE : 4.99" TFT LCD, Transmissive, IPS, Normal Black
2. DRIVE IC : ILI9881D OR EQUIVALENT
3. VIEWING DIRECTION : ALL
4. BACKLIGHT: 12 CHIP-WHITE LED
ILED=20*2mA at VLED=17.4V~19.8V
5. OPERATING TEMPERATURE: -20°C TO 70°C
STORAGE TEMPERATURE: -30°C TO 80°C
6. Brightness : 400cd/m2
7. GENERAL TOLERANCE : ±0.20

CONTROL DIMENTION:					
REFERENCE DIMENTION:	()				
APPROVED:	JOBS		MODEL NAME	3rd ANGLE	⊕
CHECKED:	ERIC		PART NAME	UNIT	mm
DESIGNED:	ISSCA		DRAWING NUMBER	SCALE	1:1
			METERIAL NUMBER	PAGE	1/1